

PT 5600 - K

COMPOSITION:

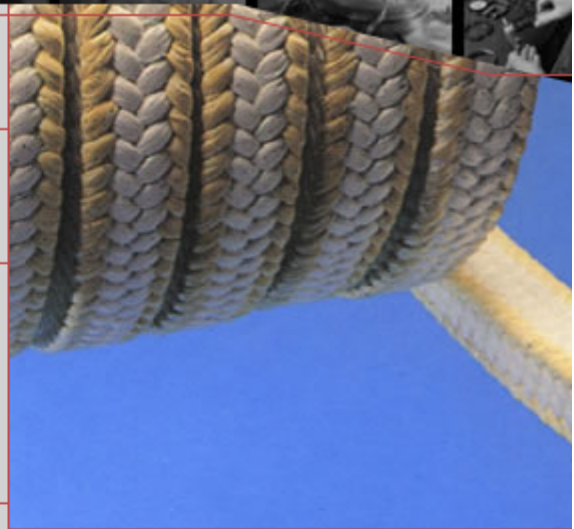
- PTFE YARN
- ARAMIDIC FIBER YARN

FEATURES:



MANUFACTURED FROM PURE PTFE FIBRE YARN WITH ALL FOUR CORNERS REINFORCED WITH ARAMIDIC FIBER YARN THAT GENERATE A STRONG RESISTANCE TO EXTRUSION AND HIGH PRESSURE. THIS BRAIDED PACKING DOES NOT STAIN AND IS IDEAL FOR FOOD AND CHEMICAL INDUSTRIES.

APPLICATIONS:

FOR PISTON PUMPS, AGITATORS, VALVES, MIXERS; SUITABLE FOR ACIDS, SOLVENTS, ABRASIVE SUBSTANCES IN PAPER MILLS, IN THE FOOD AND CHEMICALS INDUSTRIES.



TECHNICAL DATA

			
(*)			
T	°C	-200 +280	
p	bar	500	300
V	m/s	1,5	2
pH		3 ÷ 12	

(*) Do not use the product to the maximum temperature associated without consulting the manufacturer.

size mm	size inch	kg/box	lbs/box	mt/box	ft/bo
3	1/8	1,0	2,2	65,4	214
4	-	1,0	2,2	36,8	121
5	3/16	1,0	2,2	23,5	77
6	-	2,5	5,5	40,8	134
6,5	1/4	2,5	5,5	34,8	114
8	5/16	2,5	5,5	23,0	75
9,5	3/8	2,5	5,5	16,3	53
10	-	2,5	5,5	14,7	48
11	7/16	2,5	5,5	12,2	40
12	-	2,5	5,5	10,2	34
12,7	1/2	2,5	5,5	9,1	30
14	9/16	5,0	11,0	15,0	49
16	5/8	5,0	11,0	11,5	38
17,5	11/16	5,0	11,0	9,6	32
18	-	5,0	11,0	9,1	30
19	3/4	5,0	11,0	8,1	27
22	7/8	5,0	11,0	6,1	20
25,5	1	5,0	11,0	4,5	15