

N 3404

COMPOSITION:

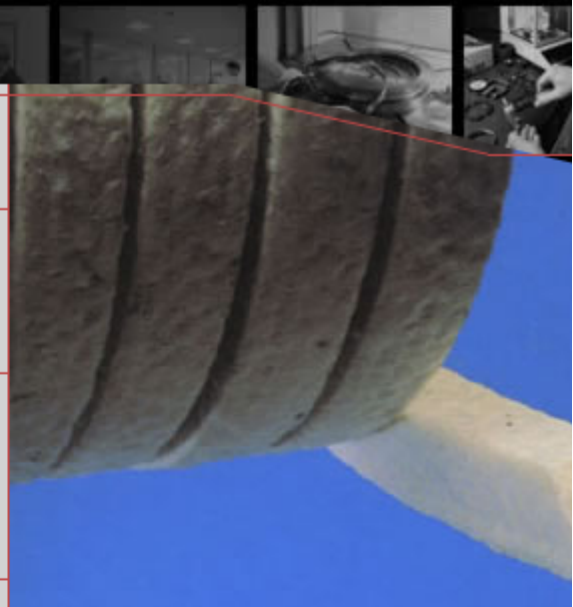
- POLYESTER SYNTHETIC FIBER
- PTFE IMPREGNATION
- LUBRICANT

FEATURES:



SYNTHETIC FIBRE DEVELOPED FOR THE PURPOSE OF CREATING A PACKING WITHOUT ASBESTOS OR ANY OTHER TOXIC FIBER. THE N 3404 PACKING IS IMPREGNATED WITH PURE P.T.F.E. AND AN INERT, SILICONE-FREE LUBRICANT.

APPLICATIONS:

DESIGNED FOR WIDE USAGE IN PAPER MILLS, FOOD AND SUGAR INDUSTRIES. LEAVES NO RESIDUES AND BEING WHITE, DOES NOT STAIN.



TECHNICAL DATA

(*)			
T	°C	-100 +250	
p	bar	100	80
V	m/s	1,5	2
pH		2 ÷ 12	

(*) Do not use the product to the maximum temperature associated without consulting the manufacturer.

size mm	size inch	kg/box	lbs/box	mt/box	ft/bo
3	1/8	1,0	2,2	79,4	260
4	-	1,0	2,2	44,6	146
5	3/16	1,0	2,2	28,6	94
6	-	2,5	5,5	49,6	163
6,5	1/4	2,5	5,5	42,3	139
8	5/16	2,5	5,5	27,9	92
9,5	3/8	2,5	5,5	19,8	65
10	-	2,5	5,5	17,9	59
11	7/16	2,5	5,5	14,8	48
12	-	2,5	5,5	12,4	41
12,7	1/2	2,5	5,5	11,1	36
14	9/16	5,0	11,0	18,2	60
16	5/8	5,0	11,0	14,0	46
17,5	11/16	5,0	11,0	11,7	38
18	-	5,0	11,0	11,0	36
19	3/4	5,0	11,0	9,9	32
22	7/8	5,0	11,0	7,4	24
25,5	1	5,0	11,0	5,5	18

packaged +/- 10 % in weight