

**KD 6604**

**COMPOSITION:**

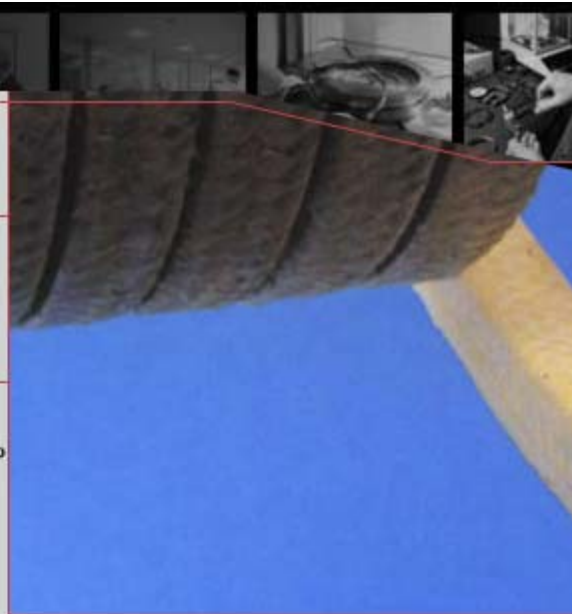
- DISCONTINUOUS ARAMIDIC COMPOSITE FIBERS
- PTFE IMPREGNATION
- LUBRICANT SILICON FREE

**FEATURES:**



UNIQUE PACKING MADE FROM COMBINED AND TWISTED ARAMID COMPOSITE FIBRES. THE IMPREGNATION IS DONE IN THREE STAGES: FIRST ON THE YARNS, SECONDLY DURING THE BRAIDING AND THIRDLY ON THE SURFACE OF THE FINISHED PRODUCT.

**APPLICATIONS:**

ON CENTRIFUGAL AND PISTON PUMPS, AGITATORS, MIXERS, WIDELY USED IN PAPER MILLS AND SUGAR INDUSTRIES.



**TECHNICAL DATA**

			
(*)			
T	°C	-100 +250	
p	bar	100	80
V	m/s	1,5	2
pH		0 ÷ 14	

(\*)Do not use the product to the maximum temperature associated without consulting the manufacturer

size mm	size inch	kg/box	lbs/box	mt/box	ft/bo
3	1/8	1,0	2,2	74,1	243
4	-	1,0	2,2	41,7	137
5	3/16	1,0	2,2	26,7	87
6	-	2,5	5,5	46,3	152
6,5	1/4	2,5	5,5	39,4	129
8	5/16	2,5	5,5	26,0	85
9,5	3/8	2,5	5,5	18,5	61
10	-	2,5	5,5	16,7	55
11	7/16	2,5	5,5	13,8	45
12	-	2,5	5,5	11,6	38
12,7	1/2	2,5	5,5	10,3	34
14	9/16	5,0	11,0	17,0	56
16	5/8	5,0	11,0	13,0	43
17,5	11/16	5,0	11,0	10,9	36
18	-	5,0	11,0	10,3	34
19	3/4	5,0	11,0	9,2	30
22	7/8	5,0	11,0	6,9	23
25,5	1	5,0	11,0	5,1	17

Packaging +/- 10 % in weight