

N 2609

COMPOSITION:

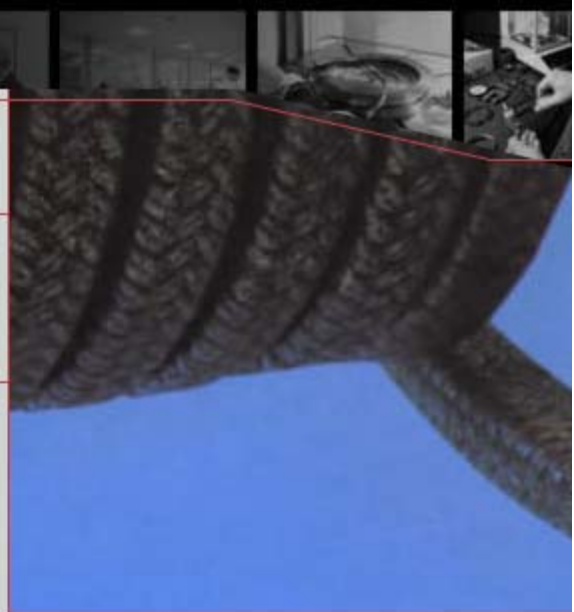
- PRE OXIDIZED/SYNTHETIC YARN
- GRAPHITE IMPREGNATION
- LUBRICANT

FEATURES:



CARRARA N 2609 HAS BEEN DEVELOPED FOR THE PURPOSE OF CREATING PACKING TOTALLY FREE FROM ASBESTOS AT A VERY COMPETITIVE PRICE. MADE OF SYNTHETIC COMPOSITE FIBRE AT THE INTERMEDIATE PRE OXIDIZED CARBON STAGE, THAN IMPREGNATED WITH GRAPHITE AND A LUBRICANT FOR HIGH TEMPERATURES, FREE FROM SILICONE.

APPLICATIONS:

OILS, STEAM, ALCOHOL LIGHT SOLVENTS, ACIDS AND ALKALIS.



TECHNICAL DATA

			
(*)			
T	°C	-50 +250	
p	bar	60	40
V	m/s	1	3
pH		4 ±10	

(*) Do not use the product to the maximum temperature associated without consulting the manufacturer.

size mm	size inch	kg/box	lbs/box	mt/box	ft/bo
3	1/8	1,0	2,2	92,6	304
4	-	1,0	2,2	52,1	171
5	3/16	1,0	2,2	33,3	109
6	-	2,5	5,5	57,9	190
6,5	1/4	2,5	5,5	49,3	162
8	5/16	2,5	5,5	32,6	107
9,5	3/8	2,5	5,5	23,1	76
10	-	2,5	5,5	20,8	68
11	7/16	2,5	5,5	17,2	56
12	-	2,5	5,5	14,5	47
12,7	1/2	2,5	5,5	12,9	42
14	9/16	5,0	11,0	21,3	70
16	5/8	5,0	11,0	16,3	53
17,5	11/16	5,0	11,0	13,6	45
18	-	5,0	11,0	12,9	42
19	3/4	5,0	11,0	11,5	38
22	7/8	5,0	11,0	8,6	28
25,5	1	5,0	11,0	6,4	21

packaged +/- 10 % in weight